


PORT  VISION

DRAG'N FLY Platform Trailer

The Drag'N Fly Platform Trailer boasts a 23' Wide x 13' Tall 5.9mm LED screen on a rotating mast. The top of the LED screen is 28' High with the bottom of the 15' off of the ground when deployed at full height. This tow behind design has a sleek low-profile and smaller foot print than competing screen trucks.

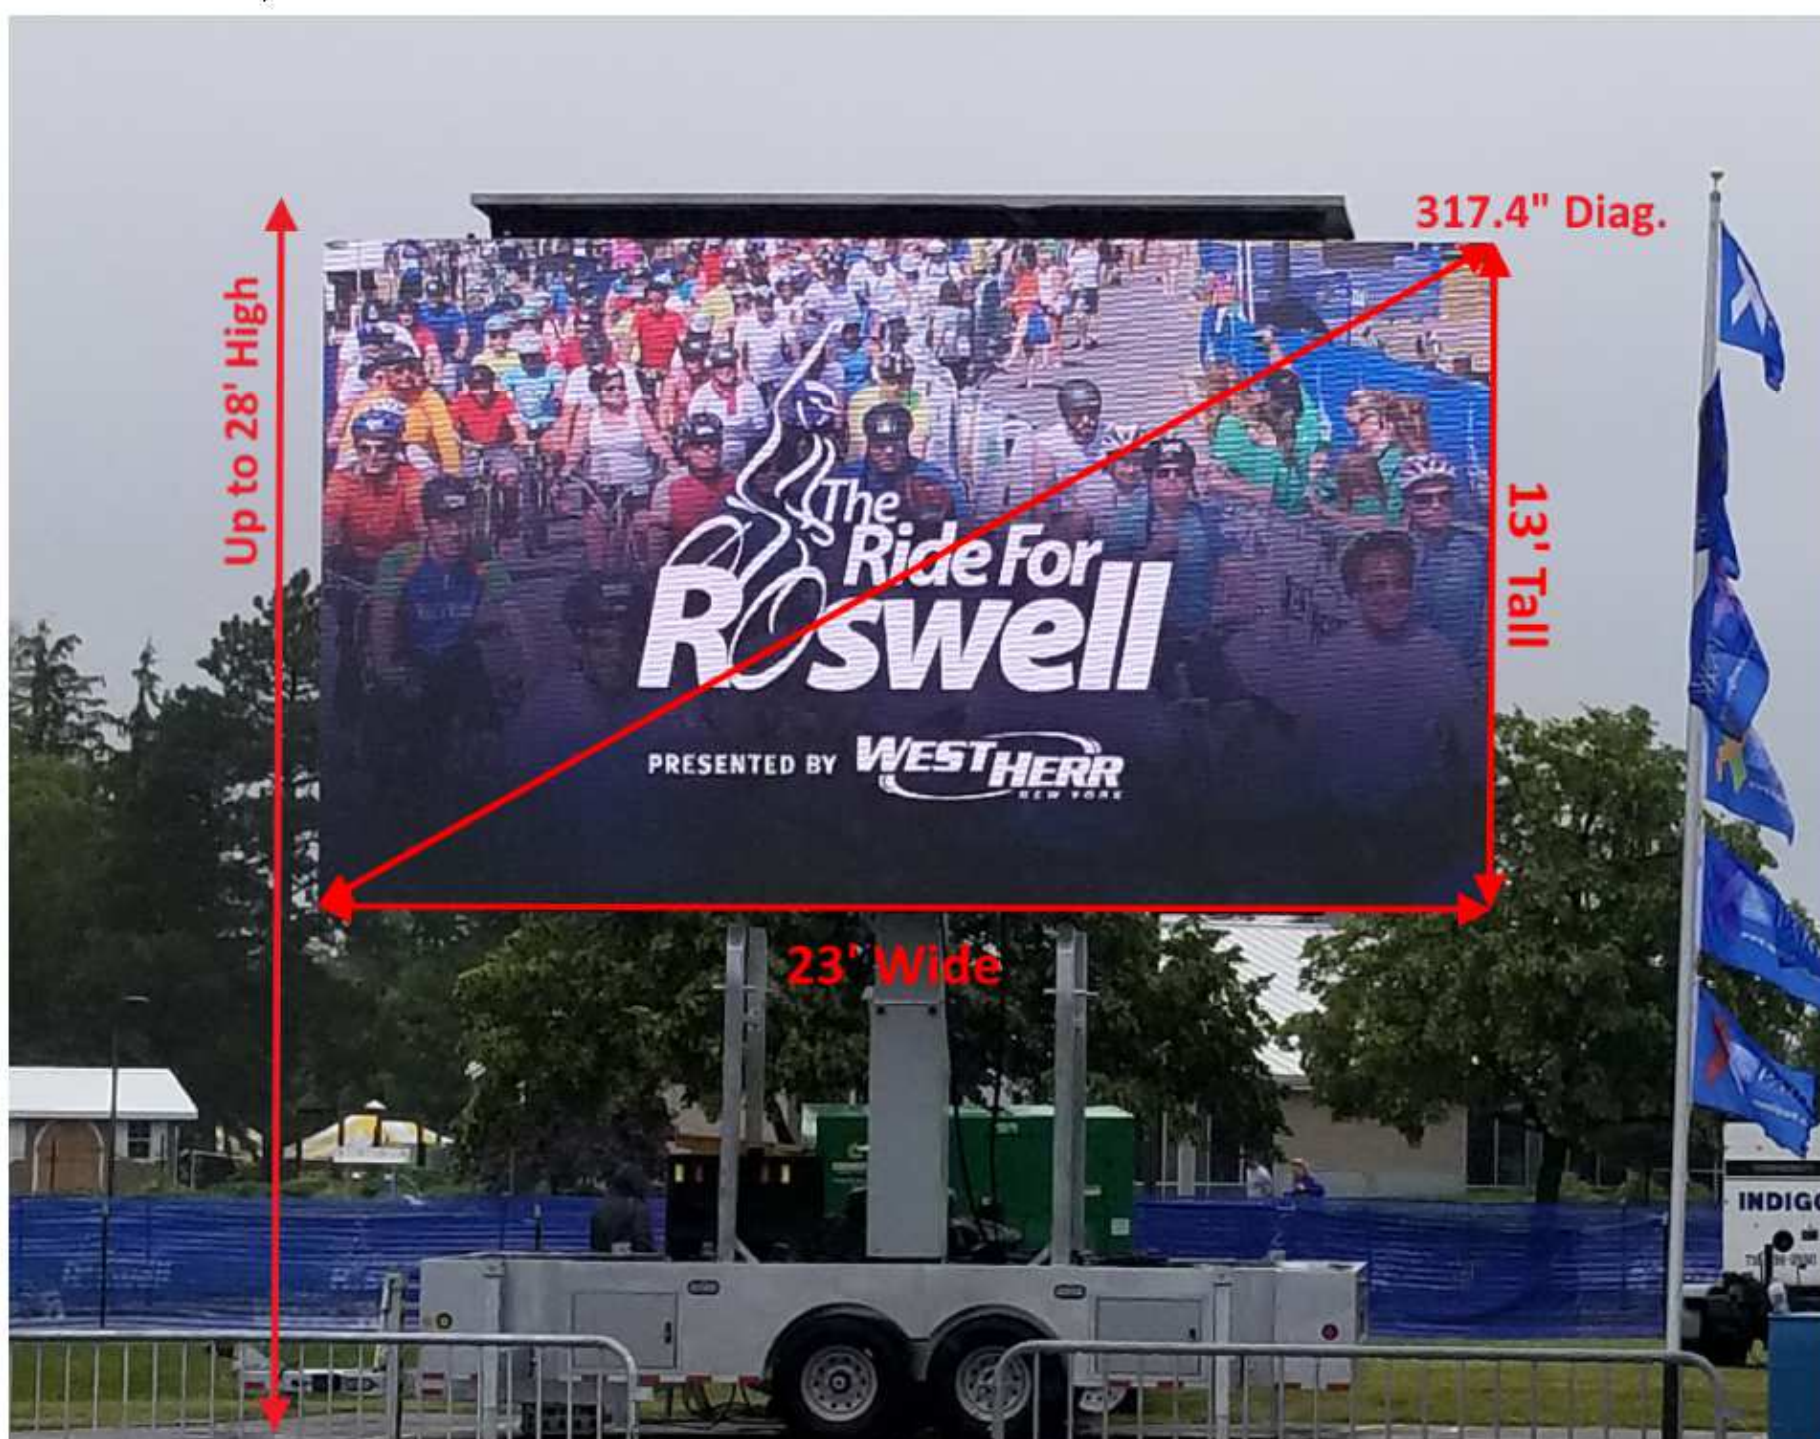

VIDEO
WALLTRONICS, INC.

22 LUKENS DR. NEW CASTLE, DE 19720
TEL. 302-328-4511 FAX 302-328-4558
WWW.RENTBIGSCREENS.COM

Drag'N Fly Platform Trailer Specifications – DLPO 5.95mm

| Drag'N Fly Platform Trailer Specifications – DLPO 5.95mm | | |
|--|-----------------------|---|
| LEDS | | |
| 5.9MM Resolution | Pixels | TOTAL PIXEL = 1176 X 672 (16:9 Ratio) |
| Brightness | Nits | 6,500 uncalibrated ; 5,800 after Cal. |
| LED Type | SMD | NationStar |
| Driver Chip | Brand | Macrobloc MBI 5252 |
| PIXELS | | |
| Pixel Configuration | | 3-in-1 |
| Physical Pixel Pitch | mm | 5.95 |
| Physical Pixel Resolution (Width) | pixels | 1176 |
| Physical Pixel Resolution (Height) | pixels | 672 |
| Physical Pixel Resolution (Total) | pixels | 790,272 |
| Physical Pixels Per Area | pixels/m ² | 28,224 |
| Processing Depth Colors | | 16bit |
| Refresh Rate | hz | 1920 to 3840 |
| LED Screen Specifications | | |
| Screen Width / Height | Ft | 23' Wide X 13' Tall |
| Screen Width / Height | Meter | 7 meters Wide x 4 meters Tall |
| Mast Height range From Ground to Top of screen | Ft | 17' Minimum to 29' Maximum |
| Viewing Angle - Horizontal | degrees | >160 |
| Viewing Angle - Vertical | degrees | >145 |
| Ingress Protection (Front/Back) | | IP65 |
| Cabinet Material and Surface Finish | | Polymer Cast Plastic |
| Operating Temperature Range | degree F | -4 to 110 |
| Operating Humidity Range | % | 10 to 90 |
| COLOR | | |
| Processing Depth Colors | | 16bit |
| Refresh Rate | hz | 1920 to 3840 |
| BRIGHTNESS | | |
| Brightness Without Calibration | nits | 6,500 |
| Brightness After Calibration | nits | 5,800 |
| Brightness Control | * | Manual |
| ON Board POWER Generator | | |
| Power output | 22KVA | 120V – 220V Single Phase |
| Input Power (Frequency) | hz | 50/60 |
| Courtesy Power Plugs for Customer | 40AMP | 2) 20 AMP dual wall plug outlets |
| Trailer Specs | | |
| Length X Width Height (in Travel configuration) | | 25' Long X 8' Wide X 13.5' Tall |
| With Screen Deployed - Outrigger stabilizer Legs | | 25 Ft Long X 12'6" Wide |
| Weight With screen and 30 Gallons Diesel Fuel | Lbs. / (2) Axels | 14,600 Lbs. Total 6800 Lbs. P/Axel. Tongue Weight 1,000 Lbs. |

All specifications are subject to change without prior notification.